


PT260

Conventional Portable Radio

KIRISUN


Main Functions:

- Clear Audio
- Multiple scan function
- Low battery alert
- Metallic appearance
- Compact Size

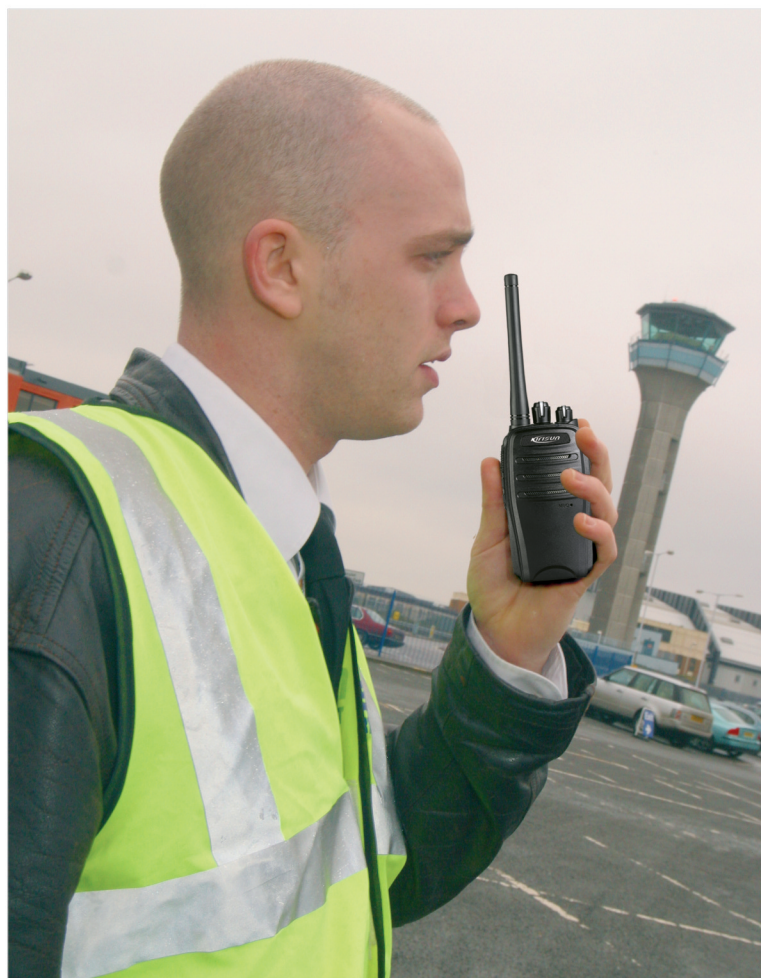

ISO9001: 2008 Accredited Designer & Manufacturer

Manufactured by Shenzhen KIRISUN Electronics Co.,Ltd.
CONTACTS: Tel: + 86 - 755 86096388 Fax: + 86 - 755 8609 6018 E-mail: export @ kirisun.com

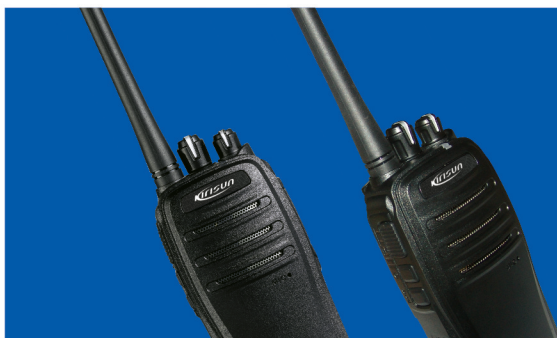

PT260 features latest technology, reliable performance, excellent audio quality and easy-to-use design. It is an ideal choice tool for affordable two-way communication in simple and daily circumstances.

Features:

• Clear audio

Audio quality is critical for effective communications. The clear audio and high fidelity allows users to continue communicating even in noisy and harsh conditions.

• 16 channels

The radio has 16 communication channels, and each channel has its own TX/RX frequency, CTC/DCS and other parameters. The radio can be flexibly grouped with other radios and communication with different teams, thereby largely improving working efficiency.

• Scan function

The channel scan feature enables the radio to continuously scan each channel in the scan list for activity. When channel to channel 16, the radio will go to scan. When activity is detected on a channel the scan process will stop and you will hear the transmission.

• High/low power

High/low power could be optional by programming.

• CTCSS/DCS

Built-in CTCSS/DCS Encoder/Decoder can prevent co-channel interference and unwanted conversations on the same channel.

• BCLO

BCLO is used to prevent the interference with the on-going conversation. If BCLO is on, the radio will be remaining in receiving status even PTT pressed to avoid interfering with others on conversation.

• TOT

TOT can prevent the radio from any potential damage caused by overlong transmission.

• Auto Power saving

When this function is enabled, and there is no signal and operation over 16 seconds, the receiving circuit will be in interval power supply status to minimize power consumption automatically.

• Monitor

Monitor the current channel to avoid missing important information.

• Two-color LED indicator

The indicator lights red while the radio is in transmitting, green while receiving or in the power on status.

• Unoccupied channel detection

With this function, the radio will make a continuous alert tone when the unoccupied channel is chosen by switching channel knob.

• Wired clone

To quickly set the parameters on a radio, you can clone the radio data from another radio with the supplied clone cable without the use of a PC or special equipment.

• Low battery alert

For extra convenience, the top-mounted LED flashes red to alert users to recharge the battery should the battery level run low.

• Metallic appearance

Convenient to carry for its delicate and compact size; fashionable for its attractive and unique metallic appearance.

SPECIFICATIONS

General

| | |
|---------------------|-------------------|
| Frequency | UHF 400--470 MHz; |
| voltage rating | DC7.5V |
| Channel Capacity | 16 |
| Channel Spacing | 12.5KHz/25KHz |
| Frequency stability | ±2.5PPM |
| Antenna Impedance | 50Ω |
| Dimensions (WxHxD) | 60mmx210mmx34mm |

Receiver

| | |
|------------------------------|-----------------------|
| Reference Sensitivity | -0.28 μV (12dB SINAD) |
| Adjacent channel Selectivity | ≥55dB(W) |
| Intermediation Rejection | ≥60dB(W) |
| Audio Power | >0.5W |
| Audio Distortion | <5% |

Transmitter

| | | |
|-----------------------------|------------------------------------|-----|
| RF Power | ≥4.5W±0.5W | ≥1W |
| Operating current | ≤1.8A | |
| Modulation sensitivity | 16mV | |
| Modulation distortion | <10% | |
| Spurious Response Rejection | ≥70dB | |
| Modulation type | 16KFϕ3E/11 KϕF3E | |
| CTCSS/CDCSS | 0.5KHZ±0.1KHZ(W), 0.3KHZ±0.1KHZ(N) | |

Standard Accessories:

The standard accessories supplied for the radio have a variety of specification options adaptable to different countries and regions.



KTC-260
Switching power



KBC-260
Desktop charger



KB-260
Li-poly Battery pack



Antenna



KGS-01
Hand strap



Belt Clip

NOTICE: The specifications may be subject to change without notice due to advancement in technology, for more detailed information, please contact Shenzhen KIRISUN Electronics Co., Ltd.

SHENZHEN KIRISUN ELECTRONICS CO., LTD.
www.kirisun.com